


Technical Information

PEVODYN® 93 Shore A

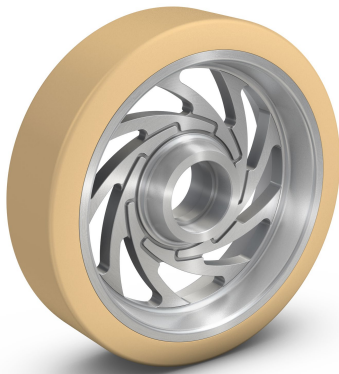

PEVODYN®

PEVODYN® is a new high-quality polyurethane elastomer which we have developed, to offer a significantly reduced starting and rolling resistance as well as high dynamic load capacity. The material is therefore particularly suitable for intra-logistic applications. Thanks to its hydrolysis resistance, PEVODYN® is perfectly suited for use in tropical climates.

- Long service life
- High load capacities
- High speeds
- High energy efficiency

Technical Informationen	Standards		Unit	Value
Hardness	DIN ISO	7619	Shore A	93 (± 3)
Density	DIN ISO	1183	g/cm ³	approx. 1,2
Elongation at break	DIN ISO	53 504	%	approx. 520
Stress value at 100%	DIN ISO	53 504	N/mm ²	approx. 8,5 - 9,0
Rebound resilience	DIN ISO	53 512	%	approx. 63 - 70
Determination of tear strength	DIN ISO	34	kN/m	approx. 40 - 50
Compression set 70 h, 23°C	DIN ISO	815	%	approx. 10 - 11
Abrasion resistance	DIN ISO	4649	mm ³	approx. 36
Coefficient of friction (traction) on wet floor at 8000 N			--	approx. 0,1
Rolling resistance at 20°C of charge (average)			%	approx. 0,5 - 0,6
Starting resistance at 20°C of charge (average)			%	approx. 0,65 - 0,75

All values indicated in this table are approximative values resulting from our own tests or information given by our raw material suppliers. The standardised tests refer to special test samples. Therefore these values are not directly applicable to wheels and castors. Furthermore these values change under such influences as temperature, humidity, duration of charge, rate of deformation, etc. For more information please visit www.raedervogel.de.

No legal obligation.